




Vertical Module Arrangement



BZV01/Z0000/10

- Fused Inlet with 2.8mm or 6.3mm tabs
- Double Contact Switch or
- Indicator Variations
- Filtered Inlet Option
- Options of I/O marked switches

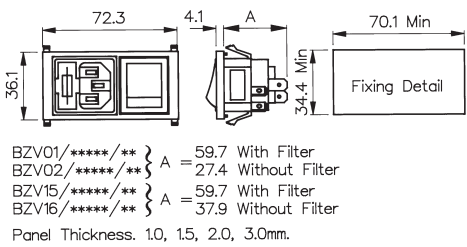

How to order -

BZV XX / XXXXX / XX		
Type of Inlet / Outlet	Filtered or Non Filtered Inlet	Combination of Other Components
Single Fused C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs: 01 = PF0011/63 02 = PF0011/28 Twin Fused C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs: 15 = PF0033/63 16 = PF0033/28	Z0000 = Non Filtered Axxxx = Standard For Filtered inlet use 6th to 9th characters from filter ordering code see pages 179-180 E.g. BZV01/A0620/10	Neon Indicator: D3 = Red Neon Indicator Double Contact Switch: 10 = D.P. Switch Double Contact Neon Switch: 11 = D.P. Red Neon Switch 12 = D.P. Green Neon Switch Double Contact High Inrush Switch: 13 = D.P. High Inrush Switch Double Contact Switch Marked I/O: 70 = D.P. Switch (I/O) Double Contact Neon Switch Marked (I/O): 76 = D.P. Red Neon Switch (I/O) 77 = D.P. Green Neon Switch (I/O) Double Contact High Inrush Switch Marked (I/O): 78 = D.P. High Inrush Switch (I/O) B1 = D.P. High Inrush Green Neon Switch (I/O)