

BY500-100 THRU BY500-800

SOFT RECOVERY FAST-SWITCHING PLASTIC RECTIFIERS

Reverse Voltage – 50 to 1000 Volts

Forward Current – 5.0 Ampere


Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Fast switching for high efficiency
- Construction utilizes void-free molded plastic technique
- High surge current capability
- Especially designed for applications such as switch mode power supplies, inverters, converters, TV scanning, Ultrasonic-systems, speed controlled DC motors, low RF interference and free wheeling diode circuits

Mechanical Data

- **Case:** Molded plastic, DO-201AD.
- **Terminals:** Plated axial leads, solderable per MIL-STD-202, method 208
- **Polarity:** Color band denotes cathode end.
- **Mounting Position:** Any.

DO-201AD

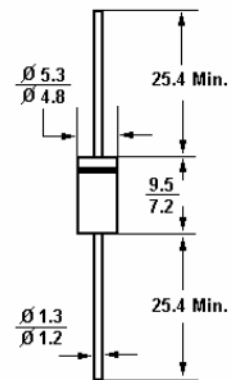


Dimensions in mm

Absolute Maximum Ratings and Characteristics @ 25°C unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.


	Symbols	BY 500-50	BY 500-100	BY 500-200	BY 500-400	BY 500-600	BY 500-800	BY 500-1000	Units
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Average forward rectified current at $T_L = 45^\circ\text{C}$	$I_{(AV)}$	5.0							Amps
Peak forward surge current 8.3mS single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	200							Amps
Maximum instantaneous forward voltage At 5.0A DC, $T_A = 25^\circ\text{C}$	V_F	1.35							Volts
Maximum DC reverse current at rated DC blocking voltage $T_A = 25^\circ\text{C}$ $T_A = 100^\circ\text{C}$	I_R	10 1000							μA
Maximum reverse recovery time (Note 1)	T_{rr}	200							nS
Typical junction capacitance (Note 2)	C_J	28							pF
Typical thermal resistance (Note 3)	$R_{\theta JA}$	22							$^\circ\text{C/W}$
Operating and storage temperature range	T_J, T_S	-50 to +125							$^\circ\text{C}$

- 1) Reverse recovery test conditions: $I_F = 0.5\text{A}$, $I_R = 1\text{A}$, $I_{rr} = 0.25\text{A}$
- 2) Measured at 1MHz and applied reverse voltage of 4volts
- 3) Thermal resistance from junction to ambient and from junction to lead at 0.375"(9.5mm) lead length P.C.B, Mounted with 0.8x0.8"(20x20mm) copper pads.



SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103



ISO 14001:2004
Certificate No. 7116




ISO 9001:2000
Certificate No. 0508098


Dated : 17/04/2003

BY500-100 THRU BY500-800


Forward current derating curve

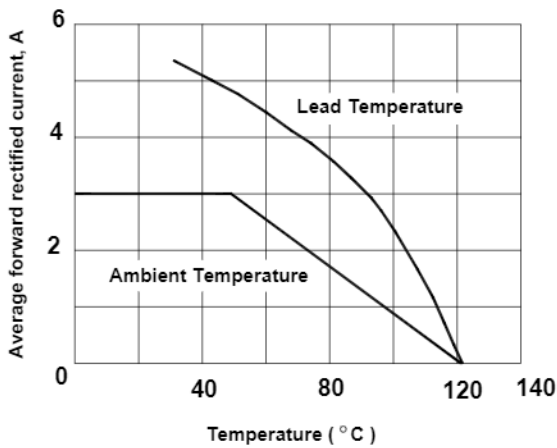


Maximum peak forward surge current

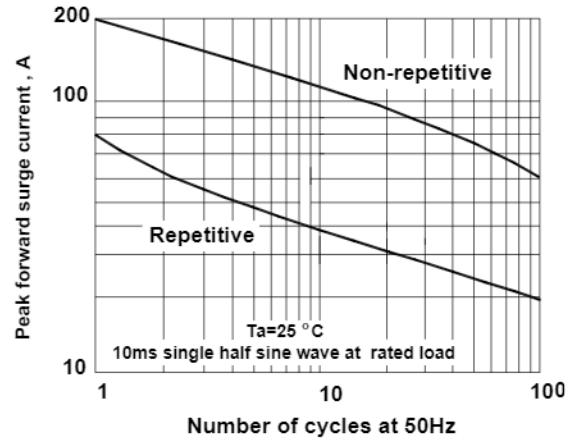



Typical Forward Characteristics

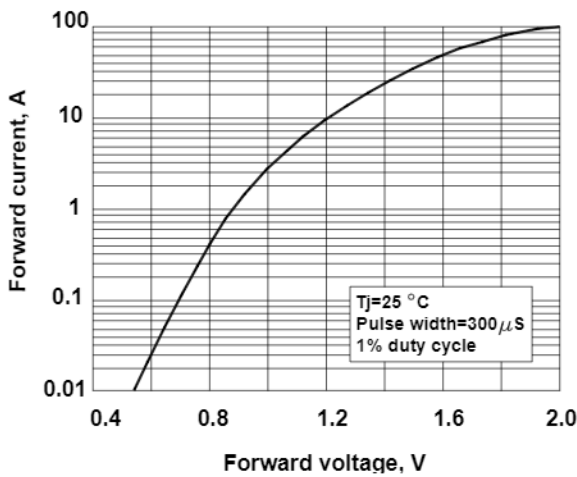

Typical Reverse Characteristics

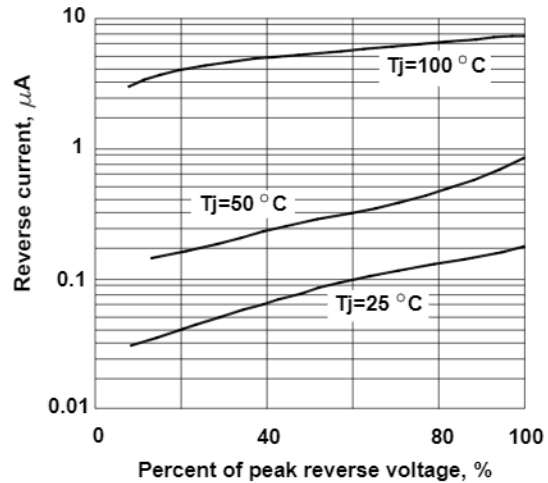

Typical junction capacitance

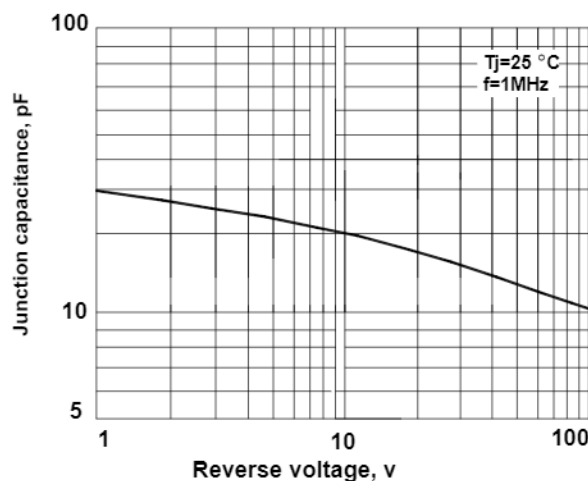

SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103



ISO 14001:2004
Certificate No. 71116



ISO 9001:2000
Certificate No. 0508098

Dated : 17/04/2003